



LEGACY

4" SQUARE POLES

4" SQUARE CAMERA POLE

Built out of a special Aerospace Aluminum, these 4" Security Camera Poles are designed to reduce the amount of movement and shake commonly found with many light poles.

Available in 5, 8, 10, 12, 15, and 16 feet tall

These innovative poles and the modular bolt-on accessories that make up this complete Security Mounting System, have a number of features that have revolutionized the mounting of security cameras and all types of security-related devices.

- Designed to fit any technology –any brand– Wireless or Wired
 - Patented “No-Welds” Technology yields more strength than any other pole (35,000 psi yield strength)
 - Internal Corner Tubing Shafts molded in
 - Made of a unique Aerospace Aluminum (6005A-T5)
 - 2"x4-1/2" Hand hole opening
 - Choice of Dark Bronze/Black or White Powder Coat
 - Mounting Base uses an 8.5" BCD bolt Pattern
 - Tilt-Over Bases have the same bolt pattern and are an upgrade when ordering.
- TOBs require a different anchor basket.

All Strong Poles are in conformance with requirements of AASHTO Spec(5th Edition), NEC Codes, International Building Codes 2001.



Available Fixed Base




Available Tilt Over Base
(Uses different anchor basket)

**Don't Settle for a repurposed light pole.
Choose the engineered solution.
StrongPoles.com / 844-669-3537**





4" Square Poles Specifications

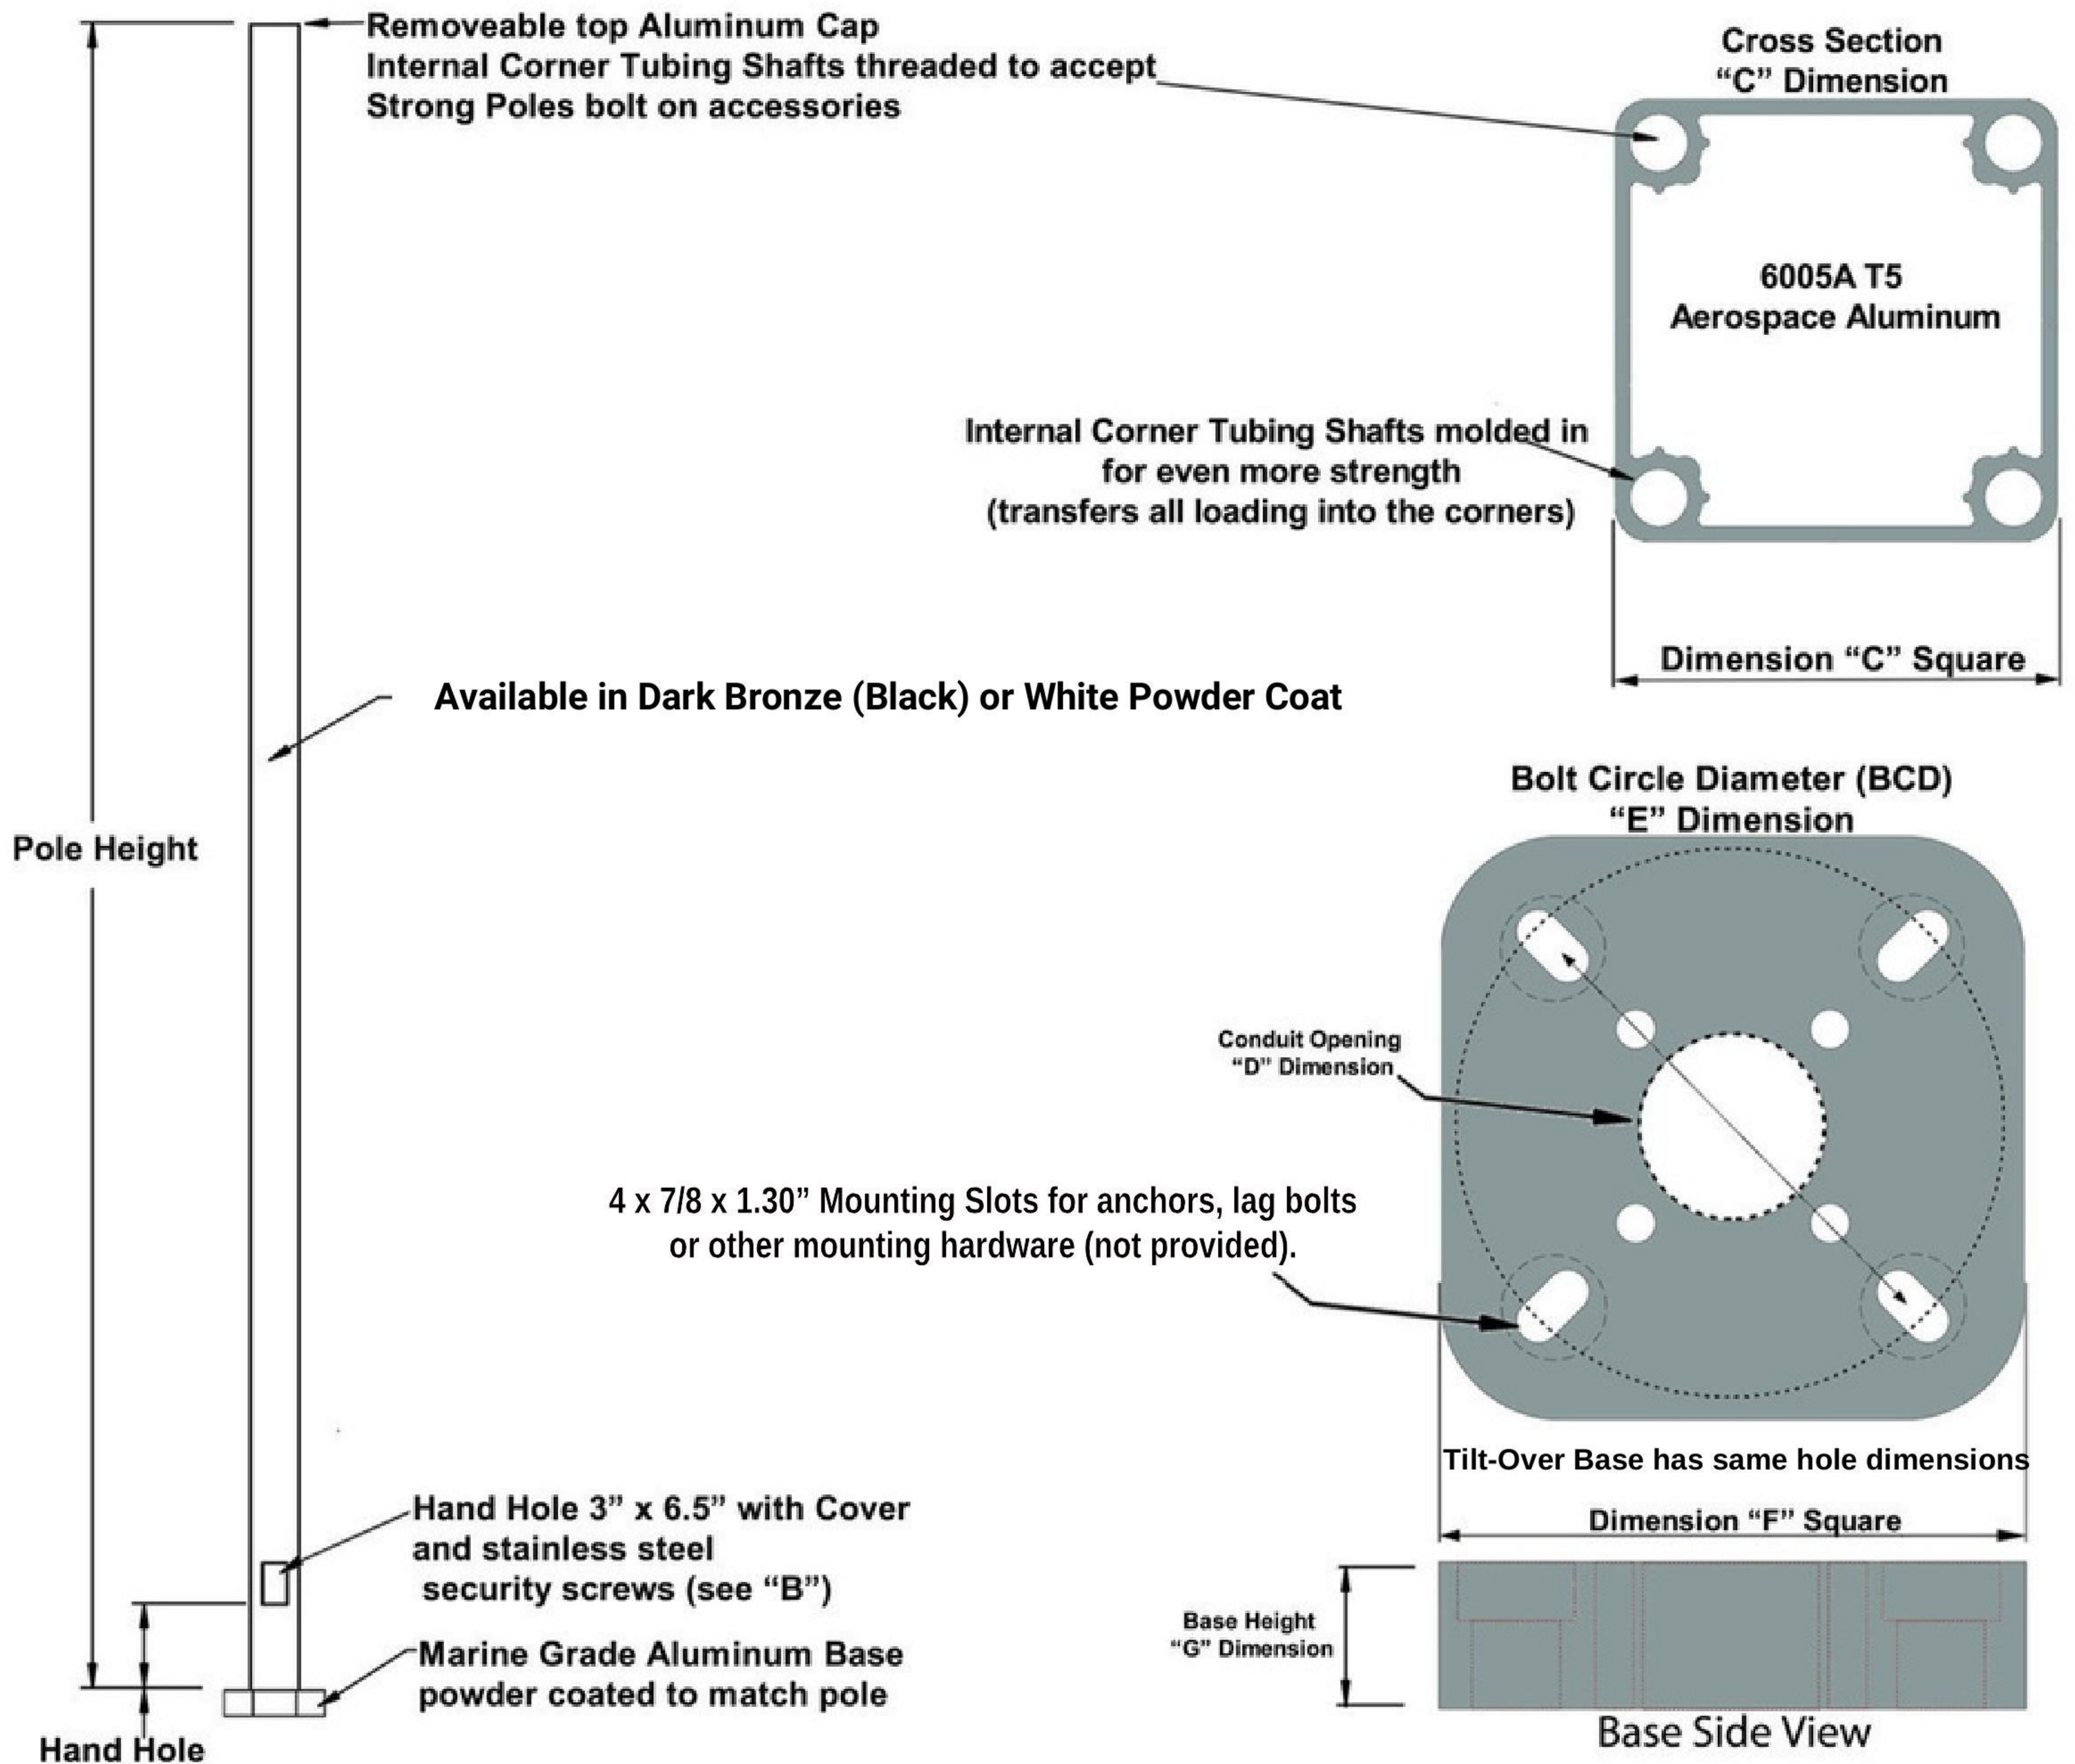

Part Number	Pole Height (in.)-(mm)	Pole Weight w/ base	A (in.)	B (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)
SP-5	5'	45 lbs	18"	2" x 4.5"	4"	2.90"	8.50"	10.00"	2.5"
SP-8	8'	60lbs	18"	2" x 4.5"	4"	2.90"	8.50"	10.00"	2.5"
SP-10	10'	70lbs	18"	2" x 4.5"	4"	2.90"	8.50"	10.00"	2.5"
SP-12	12'	75lbs	18"	2" x 4.5"	4"	2.90"	8.50"	10.00"	2.5"
SP-15	15'	90lbs	18"	2" x 4.5"	4"	2.90"	8.50"	10.00"	2.5"
SP-16	16'	100lbs	18"	2" x 4.5"	4"	2.90"	8.50"	10.00"	2.5"

EPA Wind Velocity (mph)					
Model	Height	90 mph	100 mph	120 mph	150 mph
SP-5	5 ft	60.5	46.4	30.7	19.9
SP-8	8 ft	37.6	28.8	17.2	10.9
SP-10	10 ft	33.4	25.6	15.3	9.5
SP-12	12 ft	27.6	19.6	12.5	7.9
SP-15	15 ft	22.7	15.7	9.2	5.7
SP-16	16 ft	21.4	14.7	8.4	4.7


THE TABLE ABOVE SHOWS THE EFFECTIVE PROJECTED AREA (EPA) WIND VELOCITY RATINGS FOR DIFFERENT STRONGPOLES MODELS AT VARIOUS WIND SPEEDS. THE VALUES REPRESENT THE MAXIMUM WIND SPEED (IN MPH) THAT EACH MODEL CAN WITHSTAND WHILE MAINTAINING OUR MAXIMUM AVAILABLE MOVEMENT CONSIDERING A GUST FACTOR OF 1.3. THIS GUST FACTOR ACCOUNTS FOR SUDDEN INCREASES IN WIND SPEED, ENSURING THE POLES CAN HANDLE SHORT BURSTS OF HIGHER WIND SPEEDS WITHOUT COMPROMISING STABILITY.



Foundation & Anchor Assembly Recommendations

Flush Mount Anchor Assembly to Concrete Foundation

Consult Foundation Engineer with knowledge of local soil conditions also with State and Local building codes as applicable as to the proper foundation design and depth.

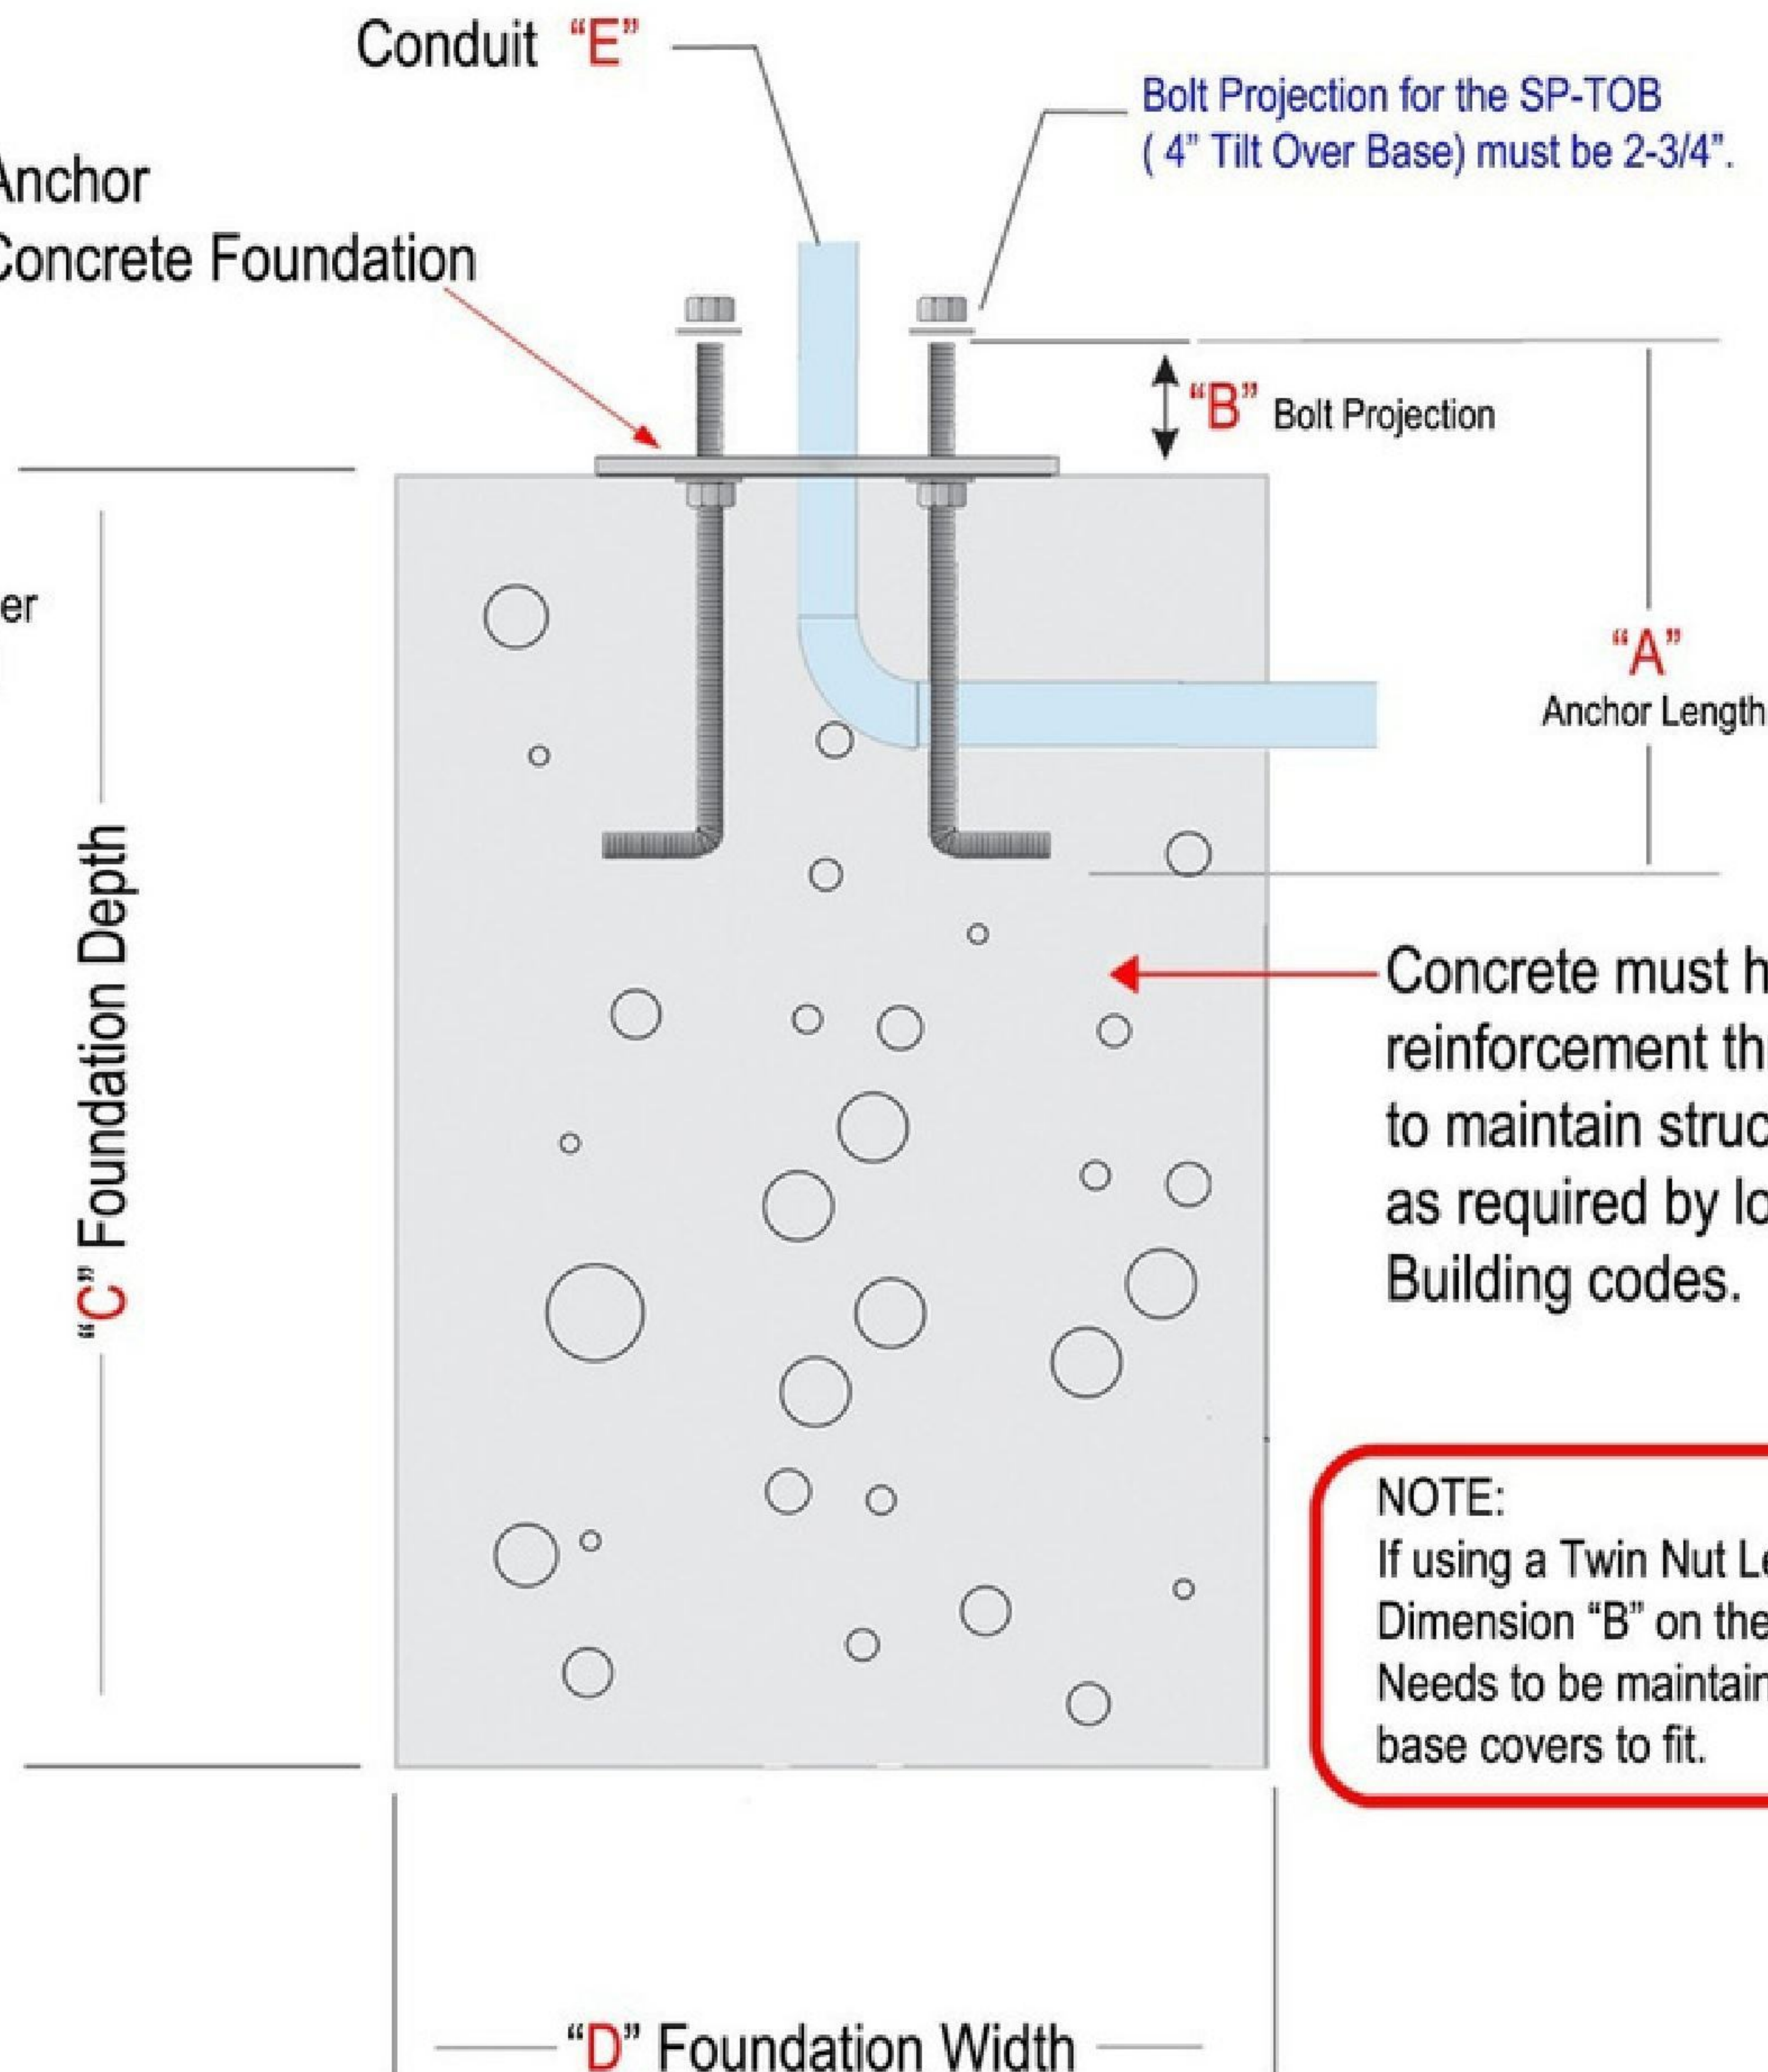

NOTE:

If using a Twin Nut Leveling System Dimension "B" on the Anchor Assembly Needs to be maintained to allow Pole base covers to fit.

Pole Size	StrongForms	Anchor Assembly Part #	"A"	"B" Bolt Projection	"C & D"	"E" Conduit Size	BCD
SteadyMax SP-SM16	StrongForm-18-5	Included	30"	2-3/4"	Consult Foundation Engineer	Maximum OD 4"	9.5"
SteadyMax SP-SM20	StrongForm-24-5	Included	36"	2-3/4"		Maximum OD 4"	11.5"
SteadyMax SP-SM25	StrongForm-30-6	Included	36"	2-3/4"		Maximum OD 4"	11.5"
4" Square Poles	StrongForm-18-5	SP-AB	18"	2-1/4" **		Maximum OD 3"	8.5"
	StrongForm-24-5						

** NOTE-Bolt Projection for the SP-TOB (4" Tilt Over Base) must be 2-3/4".

www.strongpoles.com

844-669-3537



SECTION 282000 - VIDEO SURVEILLANCE

PART 1 GENERAL

1.01 SECTION INCLUDES

- A. Accessories.

1.02 RELATED REQUIREMENTS

- A. Section 033000 - Cast-in-Place Concrete: Materials and installation requirements for concrete bases for camera poles.
- B. Section 078400 - Firestopping.
- C. Section 260526 - Grounding and Bonding for Electrical Systems.
- D. Section 260529 - Hangers and Supports for Electrical Systems.
- E. Section 260553 - Identification for Electrical Systems: Identification products and requirements.

1.03 REFERENCE STANDARDS

- A. AASHTO LTS - Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals 2013 (Revised 2019).
- B. IEEE C2 - National Electrical Safety Code 2017.
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction 2015.
- D. NECA 303 - Standard for Installing and Maintaining Closed-Circuit Television (CCTV) Systems 2019.

1.04 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the placement of cameras with structural members, ductwork, piping, equipment, luminaires, diffusers, fire suppression system components, and other potential conflicts installed under other sections or by others.
 - 2. Coordinate the work with other installers to provide power for cameras and equipment at required locations.
 - 3. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.05 SUBMITTALS

- A. See Section 013000 - Administrative Requirements, for submittal procedures. Product Data:
- B. Provide manufacturer's standard catalog pages and data sheets for each system component. Include ratings, configurations, standard wiring diagrams, dimensions, finishes, service condition requirements, and installed features. 1.
 - Camera Poles: Include information on maximum supported effective projected area (EPA) and weight for design wind speed.
- C. Camera Poles: Certify that products and associated supports comply with specified structural design criteria.

PART 2 PRODUCTS

2.01 ACCESSORIES

- A. Camera Mounting Supports: Where not factory installed, provide mounting supports necessary for installation.
 - 1. Products:
 - a. StrongPoles, LLC; HD Parapet Camera Mount: www.strongpoles.com/#sle.
 - b. StrongPoles, LLC; Parapet Mount: www.strongpoles.com/#sle.
 - c. StrongPoles, LLC; Surface Mount Pole: www.strongpoles.com/#sle.
- B. Camera Poles:
 - 1. Provide pole suitable for cameras, supports, and accessories to be installed.
 - 2. Structural Design Criteria:

- a. Comply with AASHTO LTS.
- b. Wind Load: Include effective projected area (EPA) of cameras, supports, and accessories to be installed.
 - 1) Design Wind Speed: [_____] mph ([_____] kph), with gust factor of 1.3.
- c. Dead Load: Include weight of proposed cameras, supports, and accessories.
- d. [_____].
- 3. Pole Configuration: As indicated on drawings.
- 4. Pole Configuration:
 - a. Material: Use steel or aluminum.
 - b. Shape: Use square or round, straight or tapered.
 - c. Mounting Height: [_____] , unless otherwise indicated.
 - d. Mounting: Install on concrete foundation, height as indicated on the drawings, unless otherwise indicated.
- 5. Provide ground lug, accessible from handhole.
- 6. Provide the following:
 - a. Top cap.
 - b. Handhole.
 - c. Anchor bolts with leveling nuts or leveling shims.
 - d. Anchor base cover.
 - e. Pole-to-pole non, size as required for installed camera/bracket.
- 7. Products:
 - a. Strong Poles, LLC; Steady Max Camera Poles: www.strongpoles.com/#sle.
 - b. Strong Poles, LLC; 4 Inch Square Camera Poles: www.strongpoles.com/#sle.
 - c. Strong Poles, LLC; 5 Inch Square Direct-Burial Camera Poles: www.strongpoles.com/#sle.
- C. Provide components as indicated or as required for connection of video surveillance system to devices and other systems indicated.
- D. Provide cables as indicated or as required for connections between system components.
- E. Provide accessory racks/cabinets as indicated or as required for equipment mounting.

PART 3 EXECUTION

3.01 EXAMINATION

- A. Verify that field measurements are as indicated. Verify that ratings and configurations of system components are consistent with the indicated requirements.
- B. Verify that mounting surfaces are ready to receive system components.
- C. Verify that branch circuit wiring installation is completed, tested, and ready for connection to system where applicable. Verify that conditions are satisfactory for installation prior to starting work.
- D.
- E.

3.02 INSTALLATION

- A. Install video surveillance system in accordance with NECA 1 (general workmanship) and NECA 303.
- B. Install products in accordance with manufacturer's instructions.
- C. Provide required support and attachment in accordance with Section 260529.
- D. Pole-Mounted Cameras:
 - 1. Maintain the following minimum clearances:
 - a. Comply with IEEE C2.
 - b. Comply with utility company requirements.
 - 2. Foundation-Mounted Poles:
 - a. Provide cast-in-place concrete foundations for poles as indicated; see Section 033000.

- 1) Install anchor bolts plumb using template furnished by pole manufacturer.
 - 2) Position conduits to enter pole shaft.
 - b. Install foundations plumb.
 - c. Install poles plumb, using leveling nuts or shims as required to adjust to plumb.
 - d. Tighten anchor bolt nuts to manufacturer's recommended torque.
 - e. Install nonshrink grout between pole anchor base and concrete foundation, leaving small
 - f. channel for condensation drainage.
Install anchor base covers or anchor bolt covers as indicated.
3. Embedded Poles: Install poles plumb.
- E. Provide grounding and bonding in accordance with Section 260526.
 - F. Install firestopping to preserve fire resistance rating of partitions and other elements, using materials and methods specified in Section 078400.
 - G. Identify system wiring and components in accordance with Section 260553.

END OF SECTION

EPA Wind Velocity (mph)					
Model	Height	90 mph	100 mph	120 mph	150 mph
SP-5	5 ft	60.5	46.4	30.7	19.9
SP-8	8 ft	37.6	28.8	17.2	10.9
SP-10	10 ft	33.4	25.6	15.3	9.5
SP-12	12 ft	27.6	19.6	12.5	7.9
SP-15	15 ft	22.7	15.7	9.2	5.7
SP-16	16 ft	21.4	14.7	8.4	4.7
THE TABLE ABOVE SHOWS THE EFFECTIVE PROJECTED AREA (EPA) WIND VELOCITY RATINGS FOR DIFFERENT STRONGPOLES MODELS AT VARIOUS WIND SPEEDS. THE VALUES REPRESENT THE MAXIMUM WIND SPEED (IN MPH) THAT EACH MODEL CAN WITHSTAND WHILE MAINTAINING OUR MAXIMUM AVAILABLE MOVEMENT CONSIDERING A GUST FACTOR OF 1.3. THIS GUST FACTOR ACCOUNTS FOR SUDDEN INCREASES IN WIND SPEED, ENSURING THE POLES CAN HANDLE SHORT BURSTS OF HIGHER WIND SPEEDS WITHOUT COMPROMISING STABILITY.					